




WWW.BOBRICK.COM

Technical Data

# HEAVY-DUTY STAINLESS STEEL TOWEL BARS

## B-205

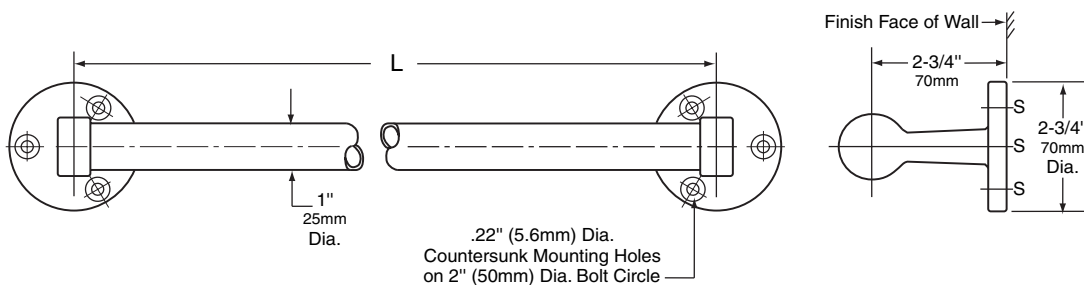

### STANDARD STOCK SIZES

Model No.	Length L
B-205 x 18	18" (457mm)
B-205 x 24	24" (610mm)

### MATERIALS:

**Towel Bar** — 18-8 S, type-304, 20-gauge (1.0mm) stainless steel tubing with satin finish, 1" (25mm) outside diameter. Notches prevent bar from rotating within support posts.

**Support Posts and Flanges (2)** — One-piece, chrome-plated, cast heavy brass with satin finish. Flanges are 2-3/4" (70mm) diameter with 3 countersunk mounting holes.

### INSTALLATION:

Mount each support post on wall with three screws, furnished by manufacturer, at points indicated by an S. For plaster or dry wall construction, provide concealed backing to comply with local building codes, then secure unit with screws furnished. For other wall surfaces, provide fiber plugs or expansion shields for use with screws furnished, or provide 1/8" (3mm) toggle bolts or expansion bolts.

### SPECIFICATION:

Towel bar shall be type-304 stainless steel with satin finish. Support posts and flanges shall be one-piece, chrome-plated, cast heavy brass with satin finish. Withstands more than 250-lb (113-kg) downward pull when properly installed. Towel bar shall not rotate within support posts.

**Stainless Steel Towel Bar shall be Model B-205 x \_\_\_\_\_ (insert length) of Bobrick Washroom Equipment, Inc., Clifton Park, New York; Jackson, Tennessee; Los Angeles, California; Bobrick Washroom Equipment Company, Scarborough, Ontario; Bobrick Washroom Equipment Pty. Ltd., Australia; and Bobrick Washroom Equipment Limited, United Kingdom.**